




RoHS

Mark	ECN NO.	DESCRIPTION	DESIGN	Date:
A		New		

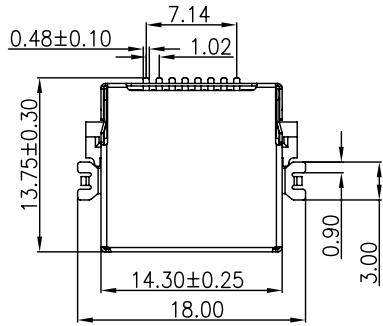

MATERIAL:  
 1.HOUSING:LCP UL94V-0; Color: Black  
 2.CONTACT:C5191, T=0.30±0.02mm  
 3.SHELL:C2680, T=0.20±0.02mm  
 PLATED:  
 CONTACT: G.F Plated On Contact Area;  
 80u" Tin Plated On Solder Area.  
 Nickel 50u" Underplating Over All.  
 SHELL: Nickel 80u" Underplating Over All.  
 ELECTRICAL:  
 1. CONTACT RESISTANCE: 20mΩ MAX.  
 2. INSULATION RESISTANCE: 500MΩ MIN.  
 3. DIELECTRIC WITHSTANDING VOLTAGE: 1000V/AC 1 MINUTE

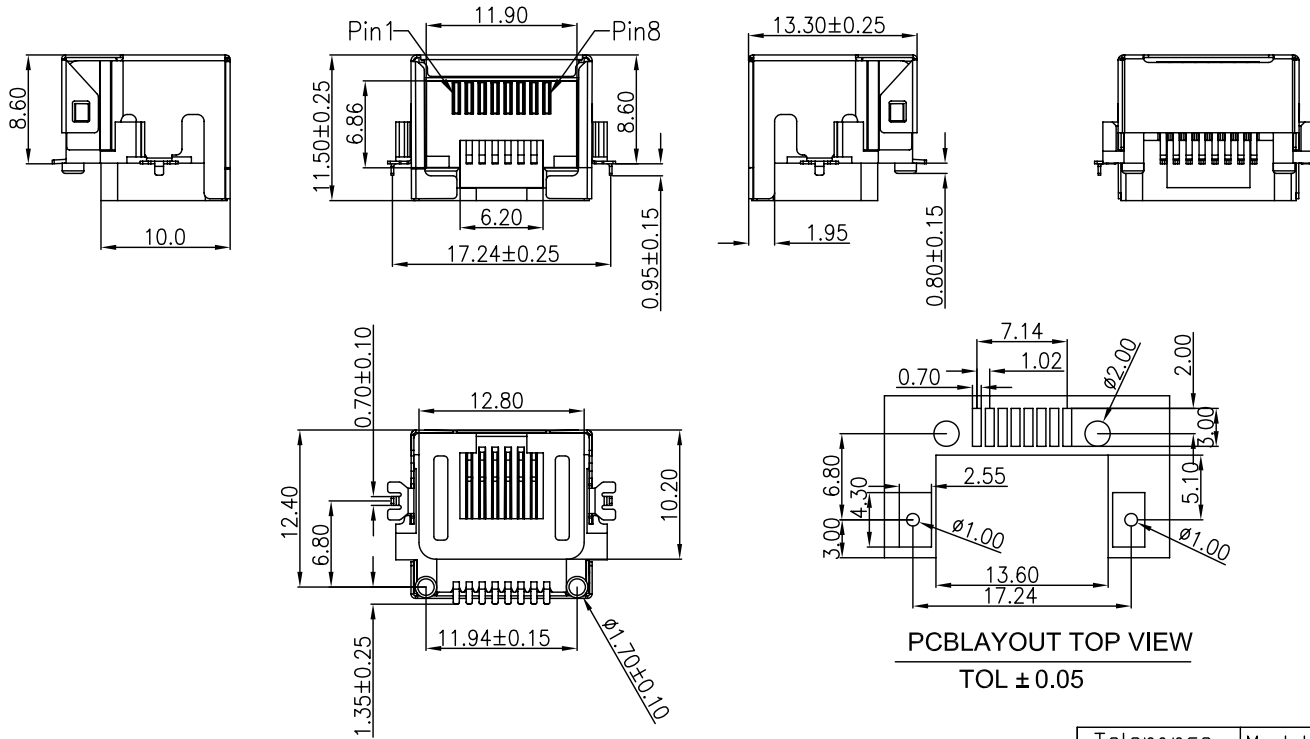

针脚定义:

Pin位	Name	Description
1	TX+	Tranceive Data+ (发信号+)
2	TX-	Tranceive Data- (发信号-)
3	RX+	Receive Data+ (收信号+)
4	N/C	Not connected (空脚)
5	N/C	Not connected (空脚)
6	RX-	Receive Data- (收信号-)
7	N/C	Not connected (空脚)
8	N/C	Not connected (空脚)

PCBLAYOUT TOP VIEW  
TOL ±0.05

Tolerance	Model Name:RJ45 8P8C 沉板式 SMT 无灯无弹 反向 载带包装	Drawing:	QIN
X.X ±0.30	Model No: WLRJ-057D	Checked:	Lijian
X.XX ±0.25	UNIT: mm	Approved:	WEI JI YANG
X.XXX ±0.15	SCALE: FULL	Date:	2014.05.28
Angle ±2.0°	REVISION: A	DWG NO.	
	SHEET: 1/1	FILE:	C
	WILCO 深圳市兴万联电子有限公司 SHENZHEN XINGWANLIAN TECHNOLOGY CO., LTD		