

**技术参数 (SPECIFICATION):**

温度范围 (TEMPERATURE RANGE): -40 ~ +70 °C

额定电压 (VOLTAGE RATING): 125V

额定电流 (CURRENT RATING): 1.5A

接触电阻 (CONTACT RESISTANCE): ≤ 30mΩ

绝缘电阻 (INSULATION RESISTANCE): ≥ 500MΩ

耐压 (DIELECTRIC STRENGTH): 1000V AC / (50HZ) / Min

插拔力 (MATING AND UNMATING FORCE): 3 ~ 20N

寿命 (DURABILITY): 750 CYCLES MIN


**材料 (MATERIAL):**

塑座 (HOUSING): GLASS FILLED POLYESTER (UL94V-0)


插针 (CONTACT): PHOSPHOR BRONZE Ø0.46mm

镀层 (PLATING): GOLD PLATING OVER NICKEL

外壳 (SHIELD): COPPER ALLOY PLATED NICKEL

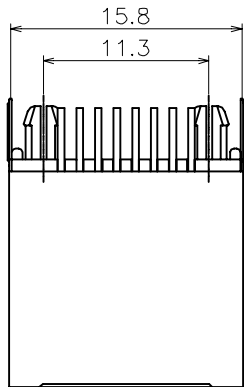

TOP VIEW

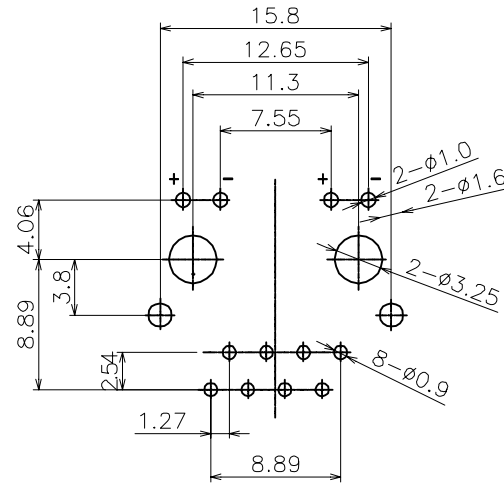

PCB LAYOUT (BOTTOM VIEW)  
RECOMMENDED

Tolerance X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 Angle ±2.0°	Model Name: RJ45 灯朝下无弹左黄右绿				Drawing: QNN
	Model No: GKRJ-005A				Checked: Lijian
	UNIT:	SCALE:	REVISION:	SHEET	Approved: WEI JI YANG
	mm	FULL	A	1/1	Date: 2015.05.08
	深圳市万联高科电子有限公司				DWG NO.
	SHENZHEN WAN LIAN GAO KE ELECTRONICS., LTD				FILE: C