RoHS

Mark	ECN NO.	DESCRIPTION	DESIGN	Date:
A	——	New	——	——

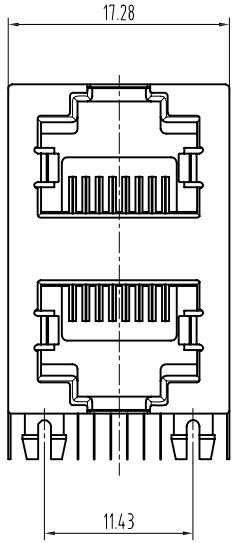

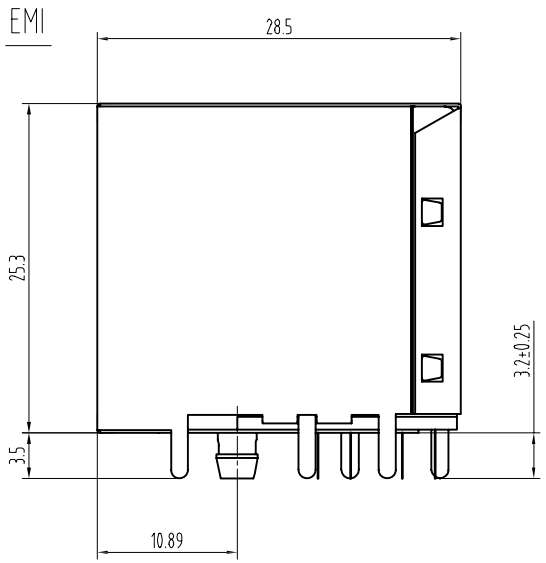

NOTES:

MATERIAL:

1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
2.CONTACT MATERIAL :PHOSPHOR BRONZE Ø0.45mm.
3.PLATING :GOLD PLATING Fu"~50u" OVER NICKEL.
4.SHIELD :0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL:

1.VOLTAGE RATING :125 VAC RMS.
2.CURRENT RATING :1.5 AMP.
3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. DURRABILITY :750 CYCLES MIN.
2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40℃~+85℃
2. OPERATION : 0°C TO 70°C.

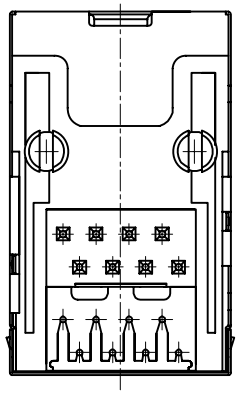

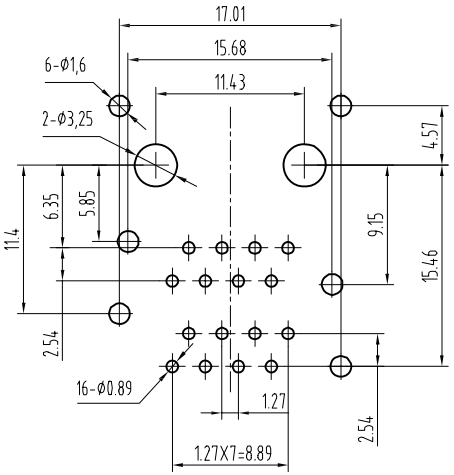

PC Board Layout

Component Side Shown

Tolerance					
X.X ±0.30	Model Name: 双层RJ45无灯无弹				Drawing: PYP
X.XX ±0.25	Model No: GKRJ-012A				Checked: ——
X.XXX ±0.15	UNIT:	SCALE:	REVISION:	SHEET	Approved: Lijian
Angle ±2.0°	mm	Full	A	1/1	Date: 2015.09.22
	YLTC 深圳市永利同创精密电子有限公司 SHENZHEN YLTC TECHNOLOGY CO,LTD				DWG NO.
					FILE: C